


DRAWING OF 8 MTR LONG P.C.C. POLE WITH WORKING LOAD 260 KG

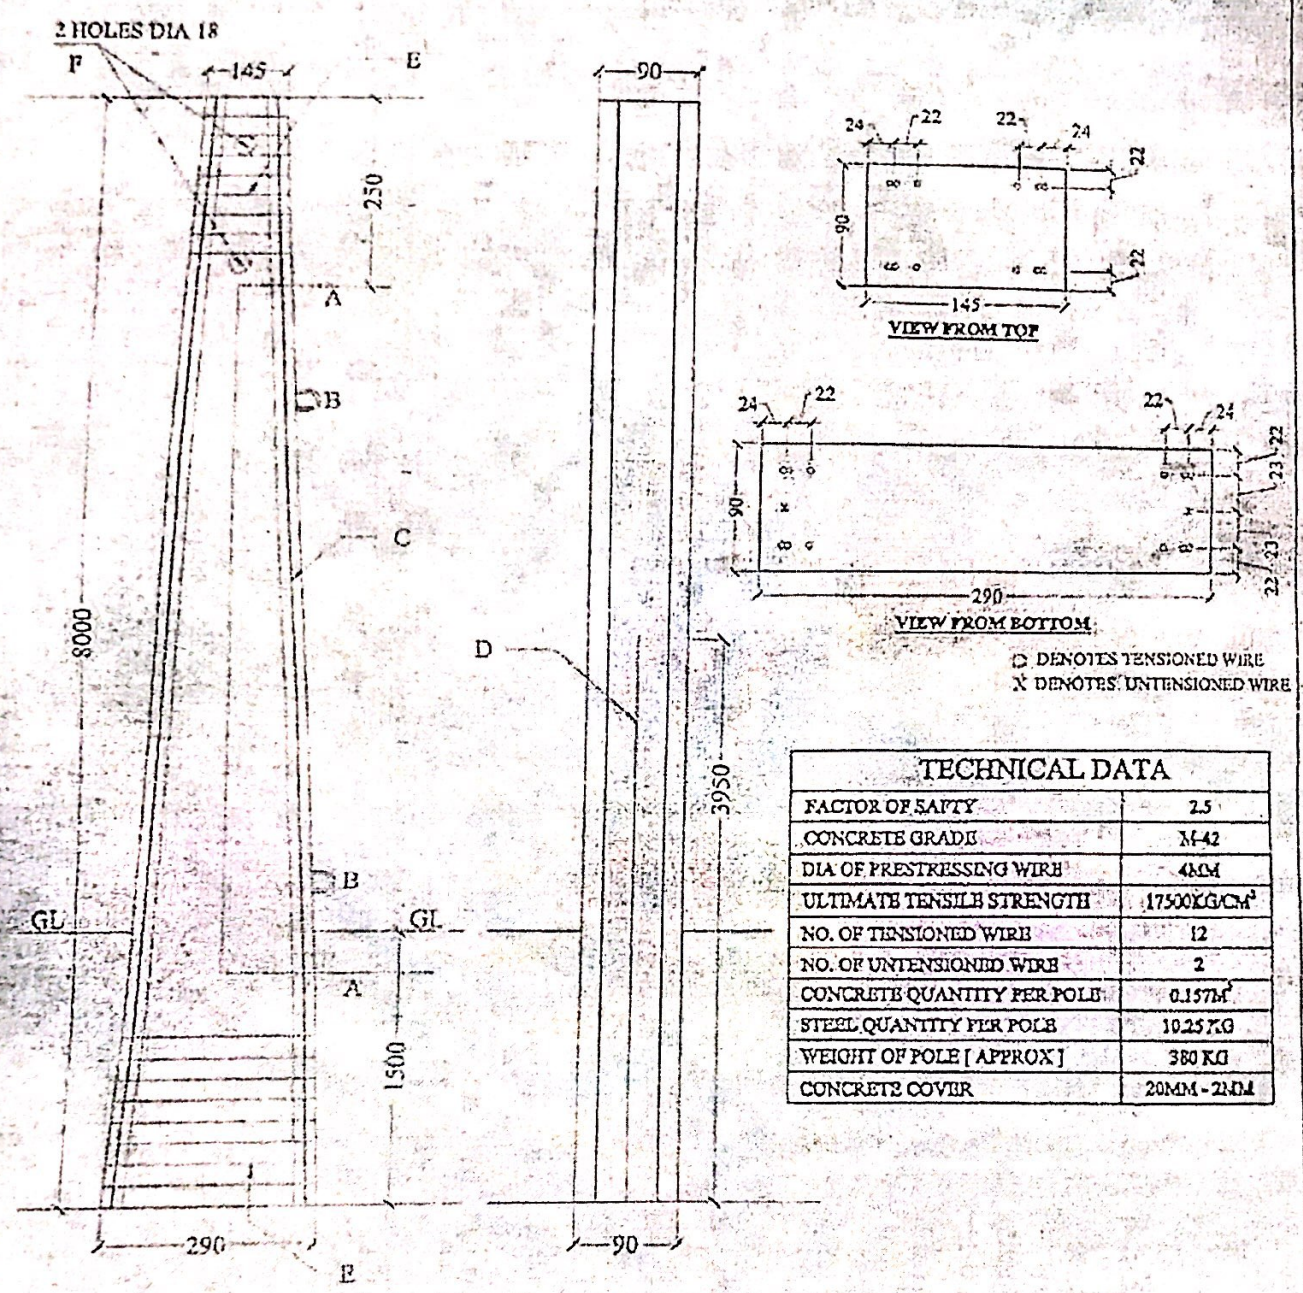

□ DENOTES TENSIONED WIRE
 X DENOTES UNTENSIONED WIRE

TECHNICAL DATA	
FACTOR OF SAFETY	2.5
CONCRETE GRADE	M-42
DIA OF PRESTRESSING WIRE	4MM
ULTIMATE TENSILE STRENGTH	17500 KG/CM ²
NO. OF TENSIONED WIRE	12
NO. OF UNTENSIONED WIRE	2
CONCRETE QUANTITY PER POLE	0.157M ³
STEEL QUANTITY PER POLE	10.25 KG
WEIGHT OF POLE [APPROX]	380 KG
CONCRETE COVER	20MM - 25MM

- A. GI WIRE OF 4MM DIA WITH A PROJECTION OF 100 MM AT 250MM FROM TOP & 150MM BELOW GROUND LEVEL.
 - B. 2 NOS. OF EYE HOOK OF 10MM DIA M.S. ROUND HAVING INTERNAL DIA OF 40MM AT 1.70M FROM TOP & 1.6 M FROM BOTTOM.
 - C. 12 NOS. OF 4 MM DIA H.T. WIRES TENSIONED.
 - D. 2 NOS. OF 4 MM DIA H.T. WIRES UNTENSIONED OF MIN. LENGTH 3.95M EACH.
 - E. 8 NOS. OF 4 MM DIA H.T. WIRES OR 4 NOS. OF 6 MM DIA M.S. ROUND RINGS ON BOTH ENDS WITH MINIMUM INTERSPACING OF 20 MM & 30 MM RESPECTIVELY.
 - F. 2 HOLES OF 18 MM DIA AT 60 MM & 160 MM FROM TOP ON LONGITUDINAL FACE OF POLE [BROAD FACE].
- ALL MARKING EMBOSSED ON TRANSVERSE FACE OF POLE.

TN-1349

ALL DIM. ARE IN MM
 DRAWING NOT TO SCALE

[Signature]
 AEM (MM&C-IV)

[Signature]
 XEN (MM&C-III)

[Signature]
 SE (MM&C)

JODHPUR VIDHYUT VITRAN NIGAM LTD., JODHPUR